



MERS-708 TIERED GAS LINE/CONDUIT ROOF SUPPORT

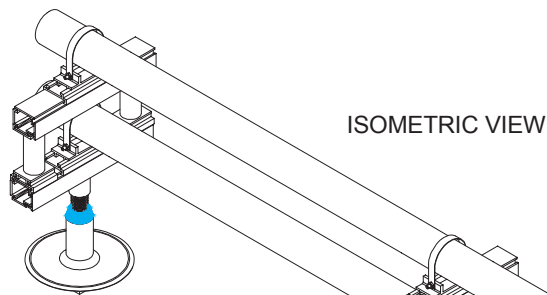


ISOMETRIC VIEW

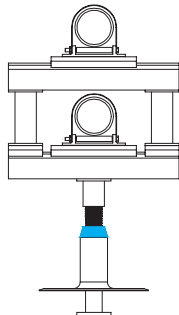


END VIEW

MERS-708
TWO TIER MODEL (One Pipe Per Tier)

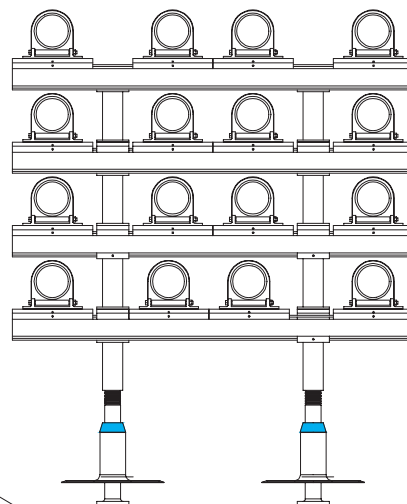

END VIEW

MERS-708
FOUR TIER MODEL
(Four Pipes Per Tier)

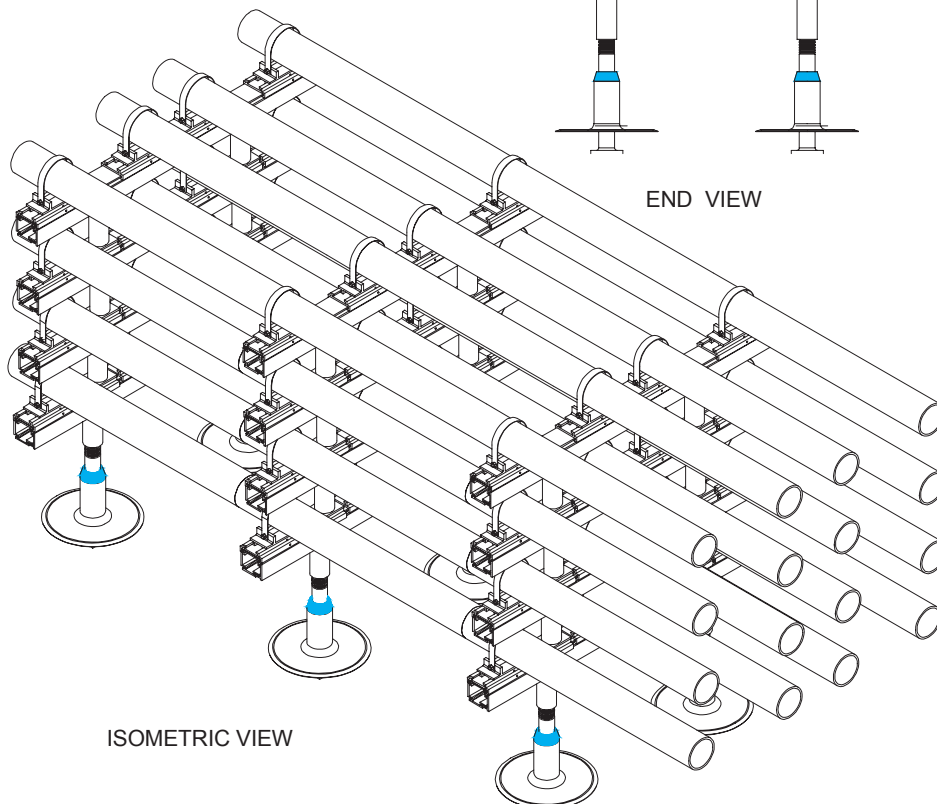

ISOMETRIC VIEW

NOTE: FOR COMPLETE PRODUCT DATA, SEE MERS-630 AND MERS-S707 DATA SHEETS (PAGES F-7 AND F-10) AS TIERED MODEL IS AN ASSEMBLY OF PARTS OF THESE TWO MODELS.

SPECIFICATION (Short Form)

Tiered gas line/conduit roof supports: Thaler MERS-708 supports, tiered as indicated: with: 6061-T6 alloy mill finish, extruded aluminum cross-bar carrier assemblies, Type 304 stainless steel roller and clearance type retaining straps, all sized to suit pipe diameters [and EPDM end caps]; adjustable height 6061-T6 hollow aluminum, mill finish, urethane insulated vertical base supports, 2" (51 mm) dia. with appropriate hardware (adhesive type supplied by others) for fastening to structural roof deck and matching, fixed (non-adjustable) intermediate vertical supports; [SJ-34 non-insulated New-Standard STACK JACK flashing for concrete deck] [SJ-37 pre-insulated New-Standard STACK JACK flashing for steel deck] 7" (178 mm) high, consisting of [.064" (1.6 mm) mill finish 1100-OT alloy aluminum] [.032" (0.831 mm) 24 oz. copper] [.031" (0.79 mm) 22 ga. Type 304 stainless steel], 2" (51 mm) dia. to CSA B272-93 with EPDM Triple Pressure Grommet Seal and EPDM Base Seal and [PVC coated deck flange] [bituminous painted deck flange]; manufactured by Thaler Metal Industries, 1-800-387-7217 (Mississauga, Ontario, Canada) or 1-800-576-1200 (New Braunfels, TX), installed as per manufacturer's written instructions. Provide 20 year warranty against leaks, condensation and defects in materials and/or manufacture.